

Tube Diffuser

High-performance air bubble tube diffuser.

LTF
DIFFUSER
-Series



Model	Material	Standard Ventilation Volume	A	B	C	Connection Size	Weight
LTF- 275- ϕ 64	Body EPDM , Connection ABS or Compound resin	80~120 L / min	275 mm	305 mm	64 mm	PT - 3/4" female	0.45 kg
★ LTF- 550- ϕ 64		160~240 L / min	550 mm	580 mm	64 mm	PT - 3/4" female	0.78 kg
★ LTF- 620- ϕ 64		180~270 L / min	620 mm	650 mm	64 mm	PT - 3/4" female	0.9 kg
LTF- 750- ϕ 64		220~330 L / min	750 mm	780 mm	64 mm	PT - 3/4" female	1.1 kg
LTF-1000- ϕ 64		290~440 L / min	1000 mm	1030 mm	64 mm	PT - 3/4" female	1.5 kg
LTF- 550- ϕ 95		350~530 L / min	550 mm	590 mm	95 mm	PT - 1 1/4" female	1.7 kg
LTF- 620- ϕ 95		395~595 L / min	620 mm	660 mm	95 mm	PT - 1 1/4" female	1.9 kg
LTF- 750- ϕ 95		485~725 L / min	750 mm	790 mm	95 mm	PT - 1 1/4" female	2.4 kg
LTF-1000- ϕ 95		640~970 L / min	1000 mm	1040 mm	95 mm	PT - 1 1/4" female	3.2 kg


★Including two categories, Single-layer and Double-layer.

Specification

- 1.High oxygen transfer efficiency
- 2.High EPDM membrane tenacity
- 3.Fewer pressure losses
- 4.Simple construction, light-weight, easy installation

Application

- 1.Aeration of fishponds
- 2.Contact aeration system
- 3.Agitation of adjustment tank

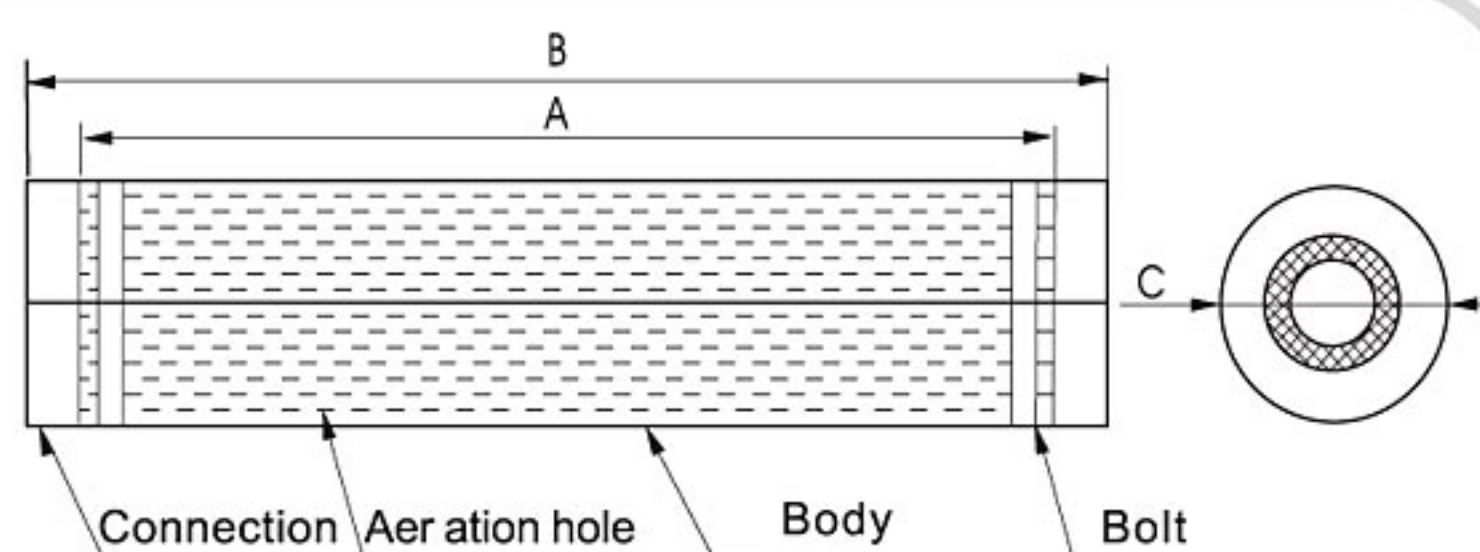

Tube Diffuser

High-performance air bubble tube diffuser.

LTF
DIFFUSER
-Series



Model	Material	Standard Ventilation Volume	A	B	C	Connection Size	Weight
LTF- 275- ϕ 64	Body EPDM , Connection ABS or Compound resin	80~120 L / min	275 mm	305 mm	64 mm	PT - 3/4" female	0.45 kg
★ LTF- 550- ϕ 64		160~240 L / min	550 mm	580 mm	64 mm	PT - 3/4" female	0.78 kg
★ LTF- 620- ϕ 64		180~270 L / min	620 mm	650 mm	64 mm	PT - 3/4" female	0.9 kg
LTF- 750- ϕ 64		220~330 L / min	750 mm	780 mm	64 mm	PT - 3/4" female	1.1 kg
LTF-1000- ϕ 64		290~440 L / min	1000 mm	1030 mm	64 mm	PT - 3/4" female	1.5 kg
LTF- 550- ϕ 95		350~530 L / min	550 mm	590 mm	95 mm	PT - 1 1/4" female	1.7 kg
LTF- 620- ϕ 95		395~595 L / min	620 mm	660 mm	95 mm	PT - 1 1/4" female	1.9 kg
LTF- 750- ϕ 95		485~725 L / min	750 mm	790 mm	95 mm	PT - 1 1/4" female	2.4 kg
LTF-1000- ϕ 95		640~970 L / min	1000 mm	1040 mm	95 mm	PT - 1 1/4" female	3.2 kg

★Including two categories, Single-layer and Double-layer.

Specification

- 1.High oxygen transfer efficiency
- 2.High EPDM membrane tenacity
- 3.Fewer pressure losses
- 4.Simple construction, light-weight, easy installation

Application

- 1.Aeration of fishponds
- 2.Contact aeration system
- 3.Agitation of adjustment tank

