

LONGTECH
Hardening
FINE BUBBLE DIFFUSER
高效率細氣泡散氣盤



ENVIRONMENTAL PROTECTION

LONGTECH




香港長泰環保有限公司


Field of application

- Bio-logical wastewater treatment.
- Aquatic products.
- Fishery spot.
- Activated sludge systems.
- Sequencing batch reactor.
- Municipal wastewater treatment plants.
- Industrial wastewater treatment plants.
- Oxygenation for sludge digestion.
- Ozone diffusion in water.
- Contact aeration system.


Dissolved Oxygen Efficient

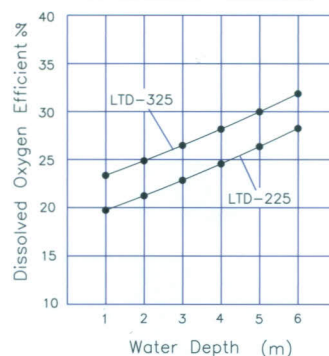

Head Loss

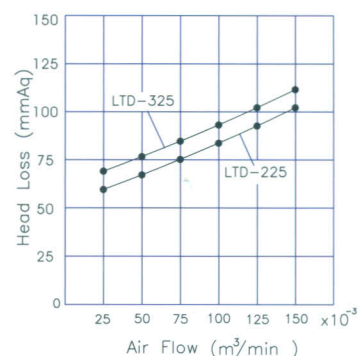

LTD-325

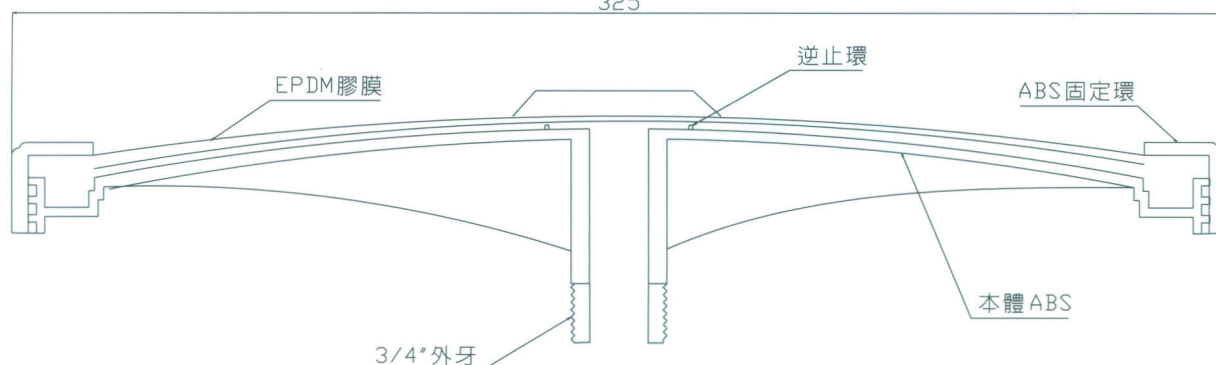

TECHNICAL DATA

Type/Diameter		LTD-225	LTD-325
MATERIAL	Holder disc	Reinforced ABS or PP	Reinforced ABS or PP
	Gasket "O" ring	ABS or PP	ABS or PP Combined inseparably within membrane
	Circular cover	Reinforced ABS or PP	Reinforced ABS or PP
	Membrane	High grade EPDM or TPE	High grade EPDM or TPE 2.5 m/m thickness
OPERATION	Air flow	0.02~0.12CMM	0.02~0.2CMM
	Connection	R3/4"NPT male	R3/4"NPT male
	Dissolved oxygen efficient	26% 4.7M water depth, 0.05 SCMM air flow, 20°C	29% 4.7M water depth, 0.05 SCMM air flow, 20°C
	Head loss	200mm H ₂ O 20°C, 0.075 SCMM air flow	250mm H ₂ O 20°C, 0.12 SCMM air flow



龍鐵機械工業股份有限公司
LONGTECH MACHINERY INDUSTRY CO., LTD.



總公司/工廠: 桃園縣蘆竹鄉南山路二段470巷23號
COMPANY: NO.23, LANE 470, NANSHAN RD., SEC.2,
LUCHU HSIANG, TAOYUAN HSIEN, TAIWAN
TEL: 886-3-324-2370 FAX: 886-3-324-2376

高雄公司: 高雄市仁武區鳳仁路97-9號
TEL: 886-7-372-2671 FAX: 886-7-372-2654
Http: //www.rootsblower.com.tw
E-mail: longtech@ms1.hinet.net